

KV30-40D mk3

High Voltage AC Test Sys-



Features

- 0-30kV output voltage
- Automatic mains voltage selection
- Key operated supply switch to prevent unauthorised operation
- Dual overload protection
- Variable electronic trip - 10-110% of rated output
- Voltage and current digital metering
- Zero-volt interlock
- External 24VDC interlock circuit
- Test timer
- Emergency stop
- Visual indication of test piece failure

The KV30-40D mk3 high voltage test set is a general purpose test instrument designed for testing insulation systems and the measurement of breakdown voltage on electrical plant and components.

The unit is supplied in a compact, portable case with a permanently connected 2 metre long HV output lead.

The KV30-40D is one of a family of 1200VA high voltage units spanning the range 6kV 200mA to 30kV 40mA. All supplied with digital metering.

Unit	Max. Voltage	Max. current	kV meter resolution	mA meter resolution
KV30-40D mk3	30kV	40mA	0.01kV	0.02mA

Unit	Maximum Voltage	Maximum current
KV6-200D	6kV	200mA
KV10-120D	10kV	120mA
KV15-80D	15kV	80mA
KV30-40D mk3	30kV	40mA

The output voltage is variable up to 30kV. A zero-voltage interlock is provided, ensuring that the output may only be energised with the voltage control at zero. The output voltage and current are metered by large true RMS reading digital meters.

The unit features automatic mains voltage selection and an external 24VDC interlock circuit for connection of emergency-off switches and interlock switches on the test enclosure.

The test object and output are protected by an adjustable electronic current trip. The trip level may be set to 10-110% of the rated output in 10% steps. Breakdown of the test object is visibly indicated and the unit must be manually reset after a trip condition before testing can be resumed.

A test timer is provided for pre-selectable test times of 5 seconds to 5 minutes.

High voltage test systems are also available from I&R Test Equipment up to 100kV 100mA.



KV100-100
100kV 100mA


KV30-40D mk3 Specification

Supply Requirements

115V/230V±10% auto-selecting 50/60Hz 1200VA max

Output

The output of the KV30-40D mk3 is supplied via a permanently connected partially screened high voltage cable. This stows in the lid for transit along with the LS30 earthing stick.

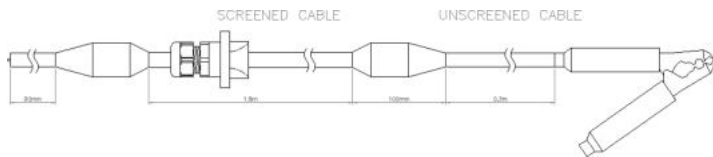

The output of the KV30-40D is rated at 40mA on a duty cycle of 5 minutes on/15 minutes off or 20mA continuously. These ratings are based on an ambient temperature of 25°C.

Metering

The output voltage and current are metered by large, accurate true RMS digital meters. The meters are backlit and have a digit height of 19mm.

Test Timer

Meter	Full scale	Resolution	Accuracy
kV	35.0kV	0.01kV	±0.5% rdg±4d
mA	50.0mA	0.02mA	±0.15% rdg±4d

A pre-selectable test timer is provided for timed tests of 5, 10, 15, 20, 30 seconds, 1, 2, 3 or 5 minutes. An alarm sounds when the test time has ended.

Overload Protection

Two overload protection circuits are provided on the units. The first is user selectable, and allows trip currents between 10% and 110% of the rated output to be set. A trip condition is indicated by an illuminated push button and an audible alarm. The second trip circuit is a magnetic circuit breaker operating on the primary of the HV transformer. This operates on large overloads (such as flashovers).

Protection and Safety

In addition to the output protection the input and control supplies are protected by fuses.

All units are designed to meet the requirements of BS LN61010.

An earth terminal is provided on the transformer which must be connected to a low impedance local earth.

An emergency stop will cut all power to the output, when activated.

Temperature Range

Storage -20°C to 60°C

Operating 0°C to 45°C

Dimensions

300x400x470mm

Weight

42kg

Accessories supplied with unit

Supply lead, spare fuse set, operating manual, 5m earth lead, LS30 earthing stick.

Special Products

If you require a different output voltage test system, please contact us with your specification and we will quote for a custom design.



LS30 Earthing stick