


HySense® PR 130 I5



Dimensions in mm

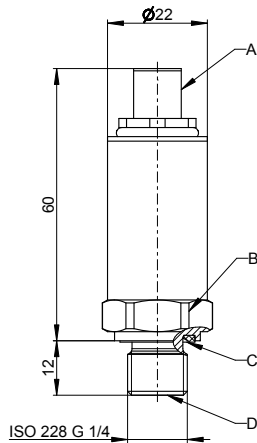

A	M12 x 1, 4-pin
B	AF 22
C	ED seal in conformity with DIN 3869, FKM

Characteristics

Output signal	4 ... 20 mA, 0 ... 10 VDC
Electrical connector	M12 x 1, 4-pin
Mechanical connection	ISO 228-G 1/4
IP degree of protection	IP67 (DIN EN 60529)
Weight	80 ... 100 g (depending on the version)

Part No.

Measuring range* bar	4 ... 20 mA	0 ... 10 VDC
-1 ... 6	3403-32-I5.37S	3403-32-I5.39S
0 ... 60	3403-21-I5.37S	3403-21-I5.39S
0 ... 250	3403-17-I5.37S	3403-17-I5.39S
0 ... 400	3403-15-I5.37S	3403-15-I5.39S
0 ... 600	3403-18-I5.37S	3403-18-I5.39S
0 ... 1000	3403-29-I5.37S	3403-29-I5.39S

* More available upon request