

Dynisco SPX-T (3-Series)

GENERAL PURPOSE SMART PRESSURE SENSORS
FOR HAZARDOUS LOCATIONS



Description

The SPX-T (3-Series) is a smart 4-20mA pressure transmitter that includes Temperature Compensation and DynaLarity™, a Dynisco innovation. The SPX-T delivers the best spec performance in the line. Temperature Compensation is based on an RTD measurement that compensates for temperature variations which reduces temperature-related drift and increases accuracy. No need to re-zero for temperature changes after installation. DynaLarity uses an advanced algorithm that will linearize offsets due to process effects on the sensor. Combined Temperature Compensation and DynaLarity reduces temperature-related drift by as much as 80% and improves accuracy by more than 60% over other sensors. Process temperature output is available (RTD or 4-20mA). HART communication is standard. The SPX 3-Series is an all-welded construction designed for use in hazardous locations and are available with a variety of different process and electrical connections.

These amplified transmitters eliminate the need for external signal conditioning. All models can interface directly with distributed control systems, PLC's, computers, and similar high level control devices


Features

- 4-20mA loop-powered output
- +/- 0.15% accuracy available
- Reduced temperature drift by 80% over non compensated units
- Temperature output available (RTD or 4-20mA)
- Wide selection of pressure ranges available
- Turndown 6:1
- Configurations available for use in hazardous locations
- Remotely configurable via HART
- Precise, repeatable pressure measurements
- Output supplied directly to DSC or PLC
- Meets CE requirements
- CE ATEX Intrinsically Safe Approved
- IECEx Intrinsically Safe Approved
- FM Explosion proof approved
- CSA Explosion proof approved
- SIL 2 Certified (pressure output)
- PL 'c' Certified (relay output)
- Additional approvals are available

Performance Characteristics SPX-T (3- Series)	
Output	4 - 20 mA, with optional HART™
Input Voltage	16 - 36 Vdc (Std); 16 - 30 Vdc (ATEX IS)
Accuracy	<p>32XX: ± 0.25% for pressure ranges ≥ 3,000 psi ± 0.5% for pressure ranges = 1,500 psi ± 0.75% for pressure ranges < 1,500 psi</p> <p>33XX: ± 0.15% for pressure ranges ≥ 3,000 psi ± 0.25% for pressure ranges = 1,500 psi ± 0.5% for pressure ranges < 1,500 psi</p> <p><small>Accuracy is defined as the combined error expressed as a percentage of full scale output with the specifications of: Electronics ambient temperature; Snout compensated temperature range; capillary of ≤ 36"; DyMax coated 15-5 SST diaphragm; Best Straight Line (BSL) %FS, per ISA-37.1. Consult Factory for availability and specifications of other configurations.</small></p>
Repeatability	±0.1%
Rangeability	6:1 Turndown
Over Pressure	1.5 x FSO
Load Resistance	500 Ω @ 24 Vdc, 1,000 Ω @ 36 Vdc
Electronics Ambient Temperature	70°F (20°C)
Electronics Operating Temperature	-20 to 185°F (-29 to 85°C)
Electronics Compensated Temperature Range	70 to 185°F (20 to 85°C)
Snout Compensated Temperature Range	70 to 572°F (20 to 300°C)
Snout Operating Temperature	Models: 3242, 3243, 3342, 3343: 32 to 752°F (0 to 400°C) Models: 3290, 3291, 3390, 3391: 32 to 600°F (0 to 315°C)


Mechanical Characteristics	
Mounting Torque	3242: 500 inch-lbf max 3243: 50 inch-lbf max 3342: 500 inch-lbf max 3343: 50 inch-lbf max 3290: 350 inch-lbf max 3291: 350 inch-lbf max 3390: 350 inch-lbf max 3391: 350 inch-lbf max
Standard Wetted Parts	DyMax coated 15-5 PH SST
Approvals & Certifications	
ATEX/IECEX Intrinsically Safe	
SIL 2 (pressure output) & PL'c' (relay output)	
FM & CSA Explosion Proof	
Additional Approvals are Available	

Ordering Guide for Models SPX3242¹

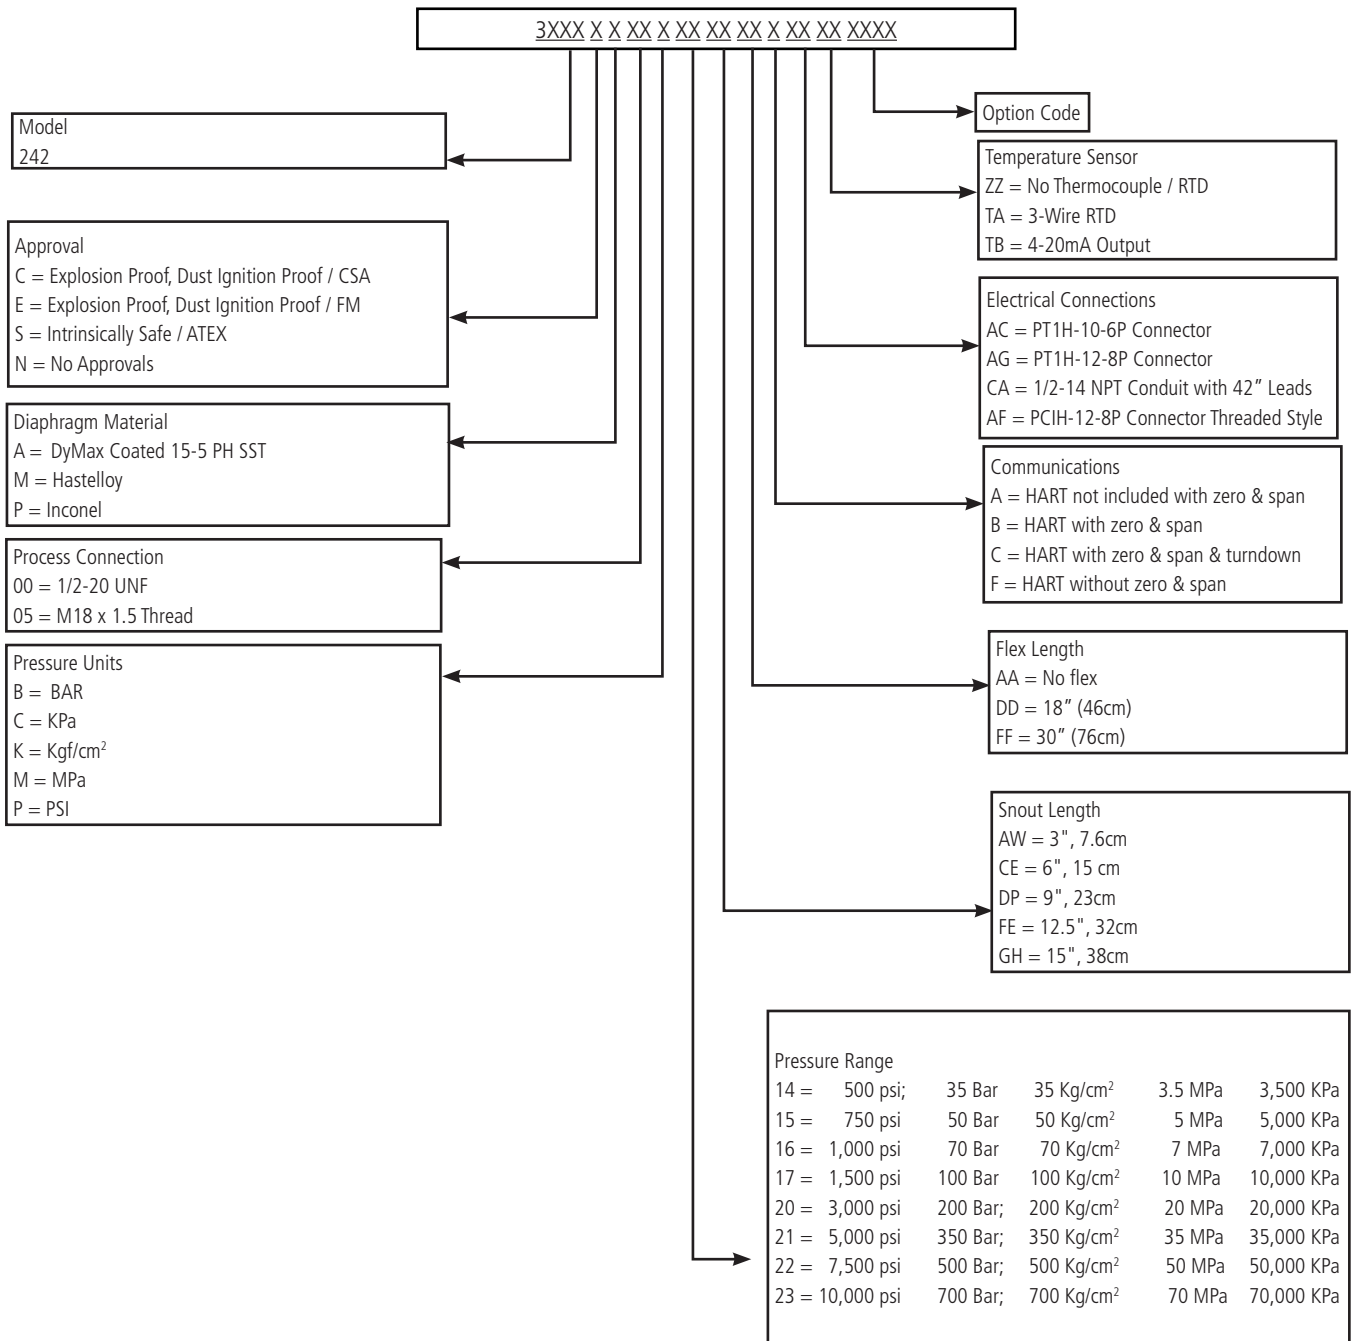


¹ Other configurations are available. Please consult factory.

Ordering Guide for Models SPX3243¹

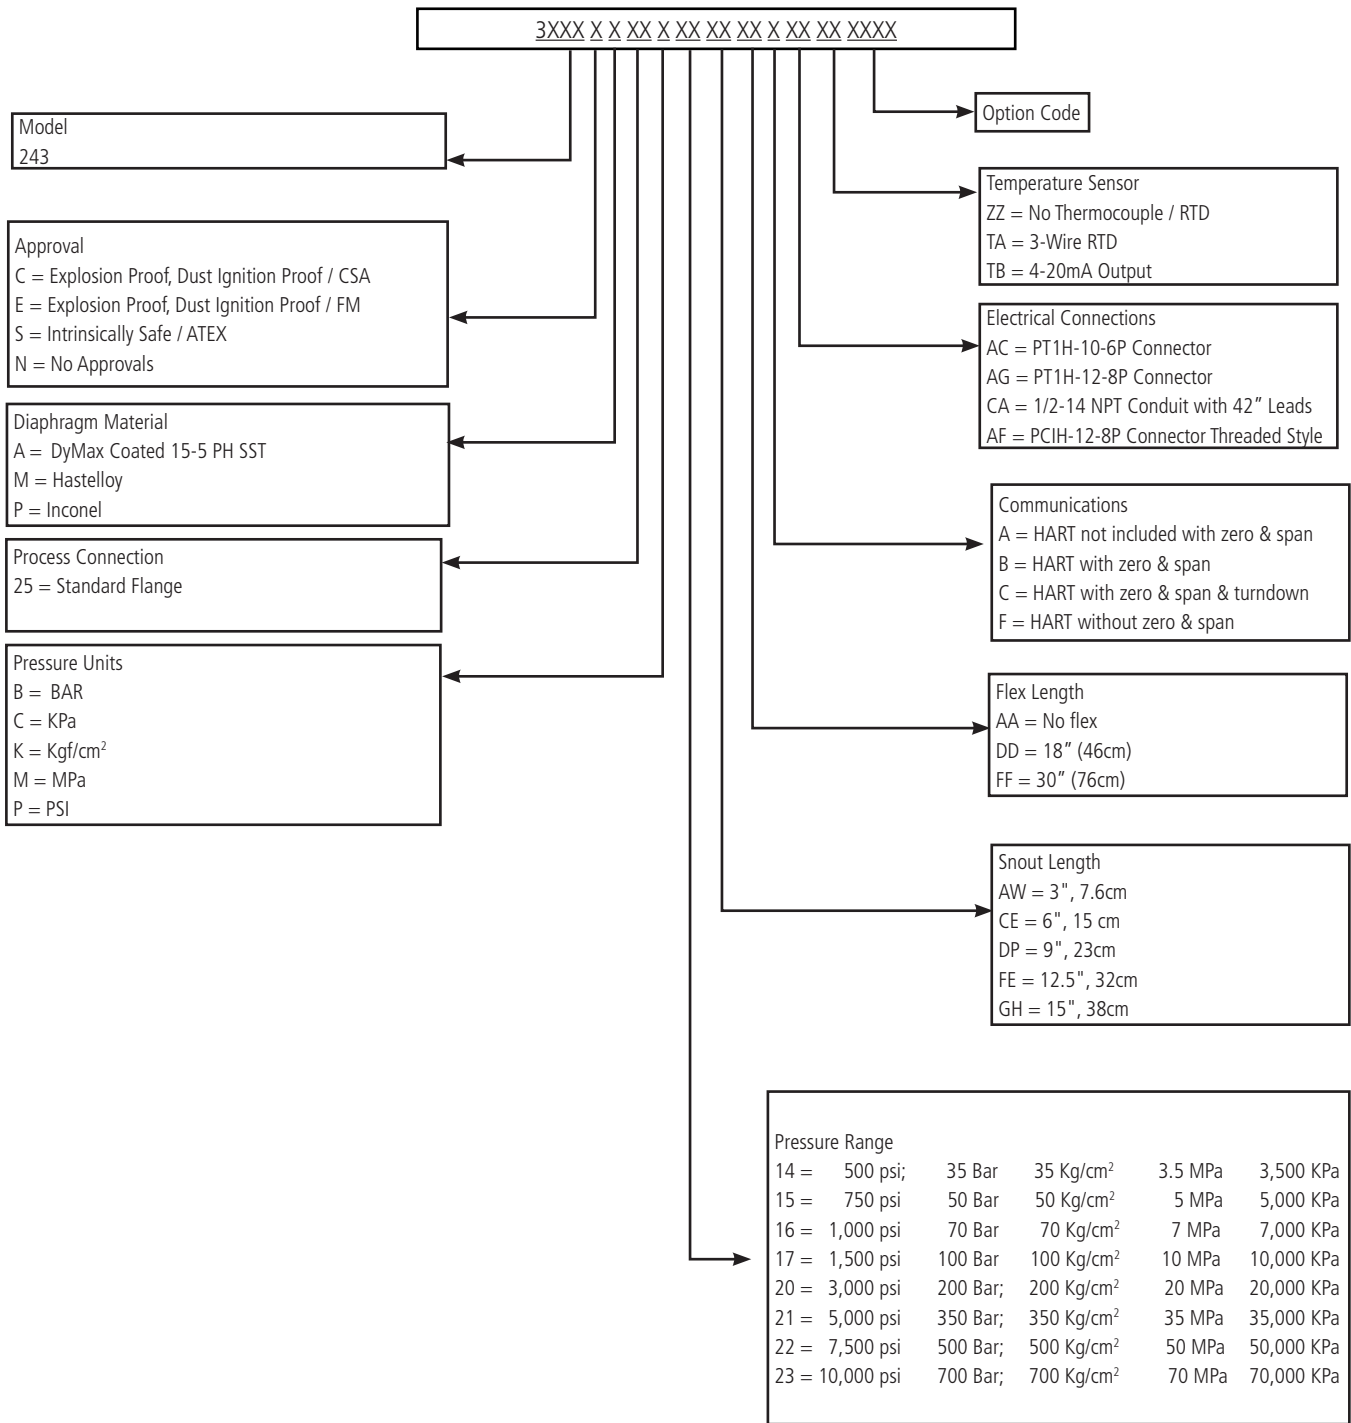


¹ Other configurations are available. Please consult factory.

Ordering Guide for Models SPX3342¹

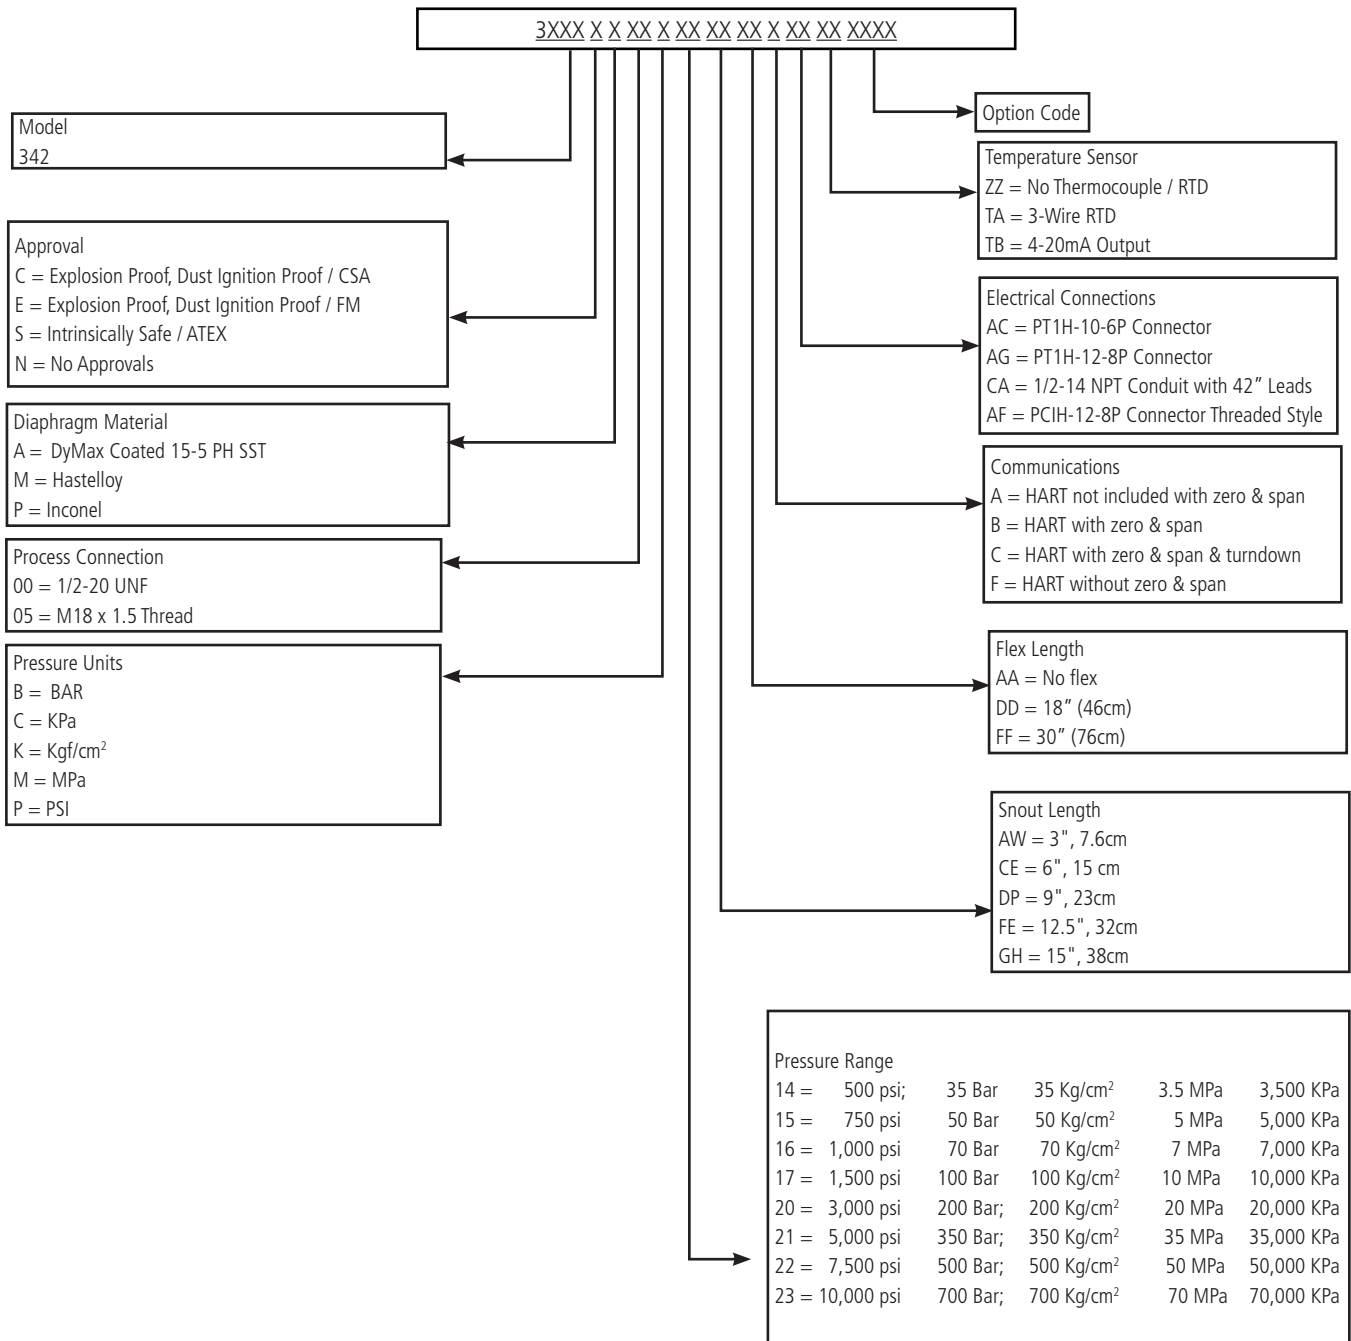


¹ Other configurations are available. Please consult factory.

Ordering Guide for Models SPX3343¹

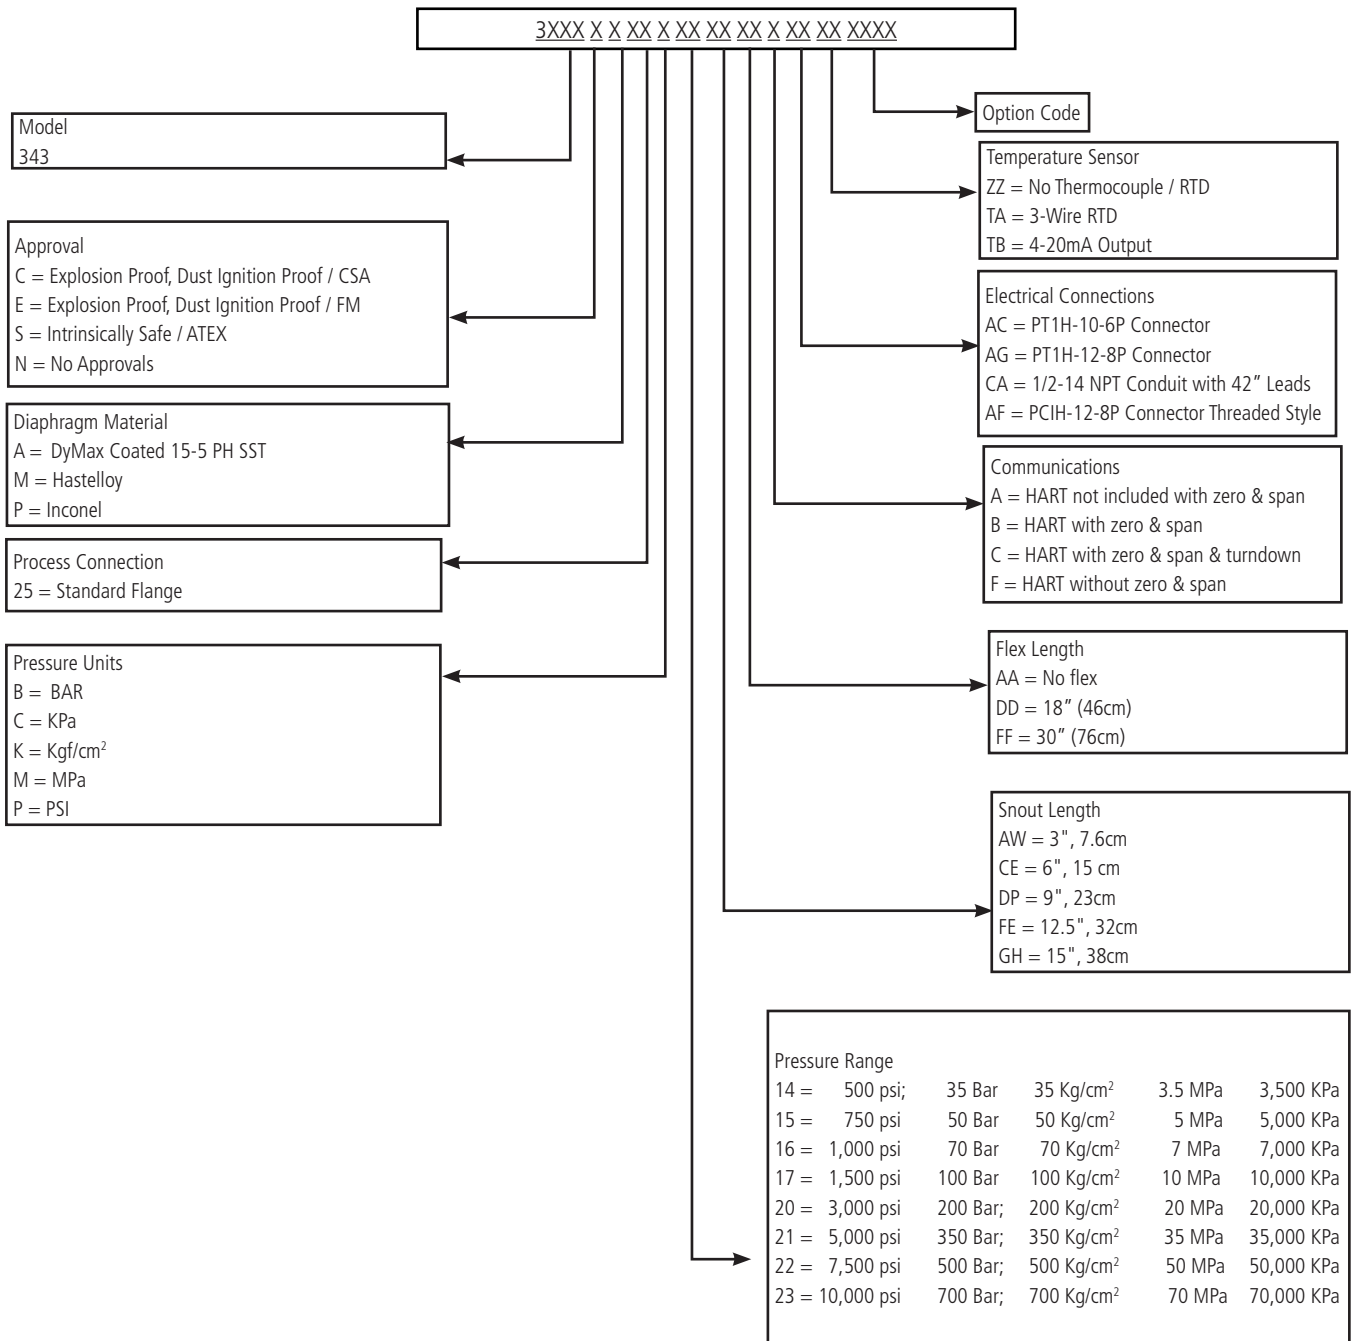


¹ Other configurations are available. Please consult factory.

Ordering Guide for Models SPX3290¹

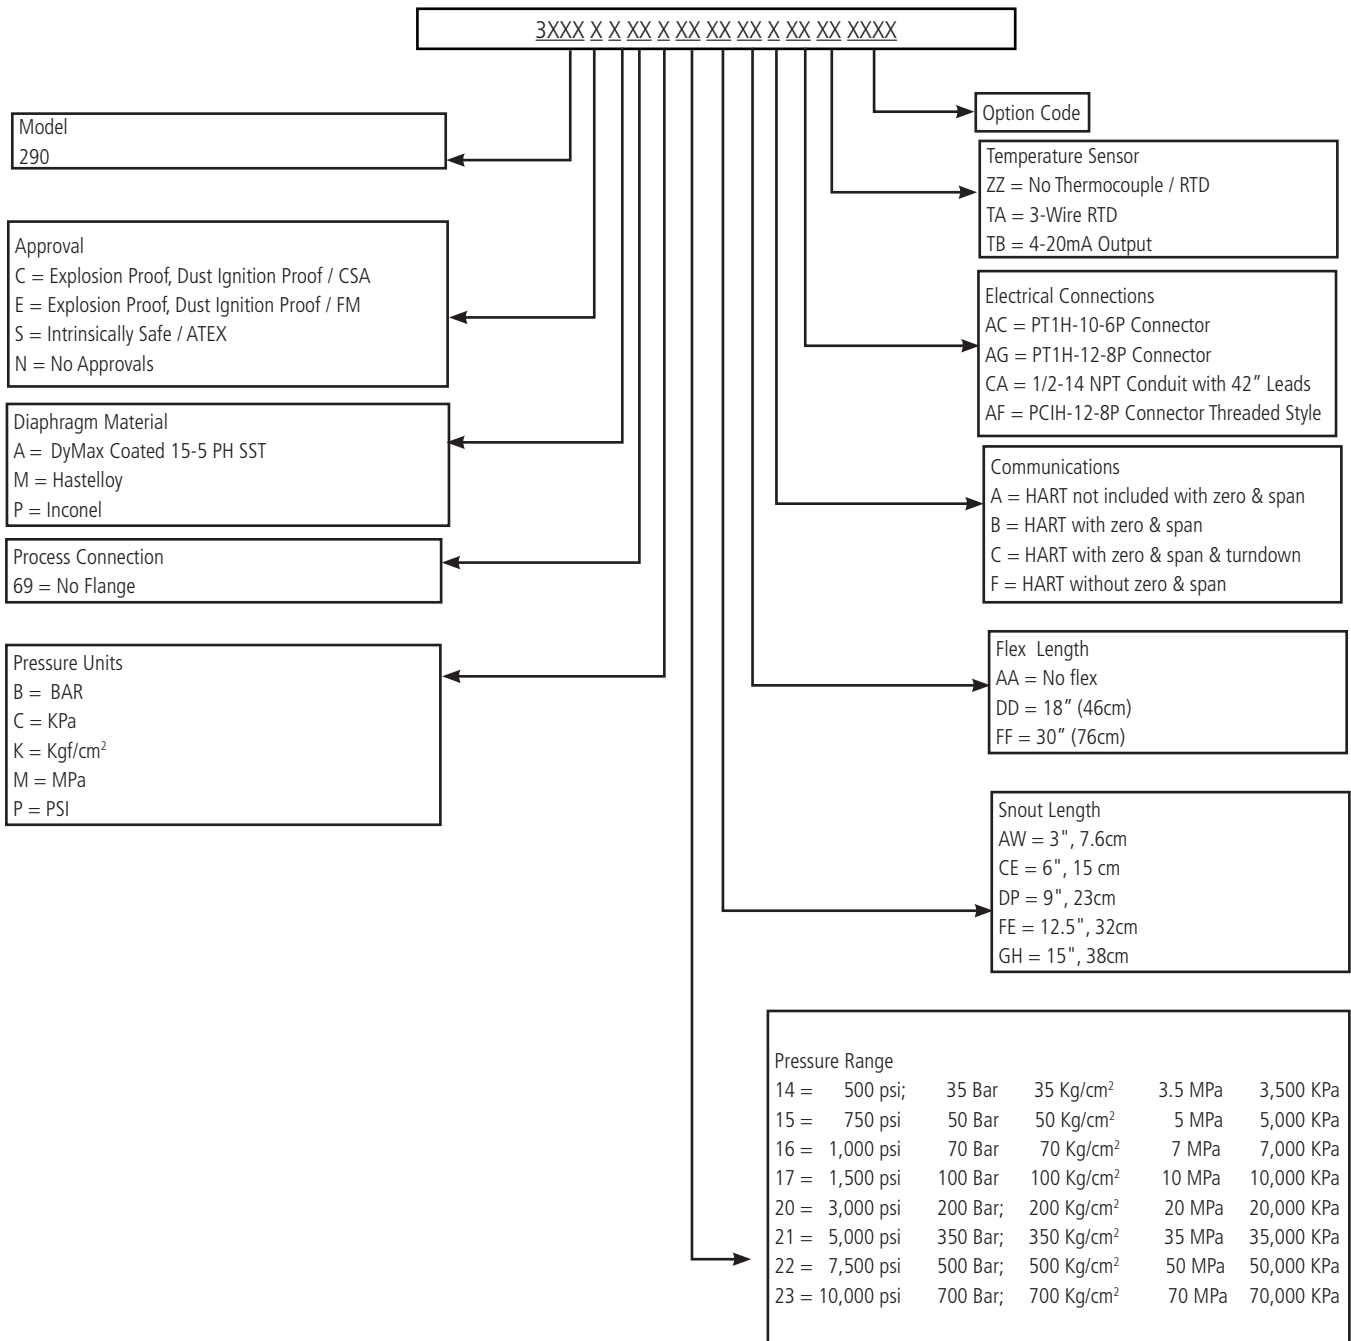


¹ Other configurations are available. Please consult factory.

Ordering Guide for Models SPX3291¹

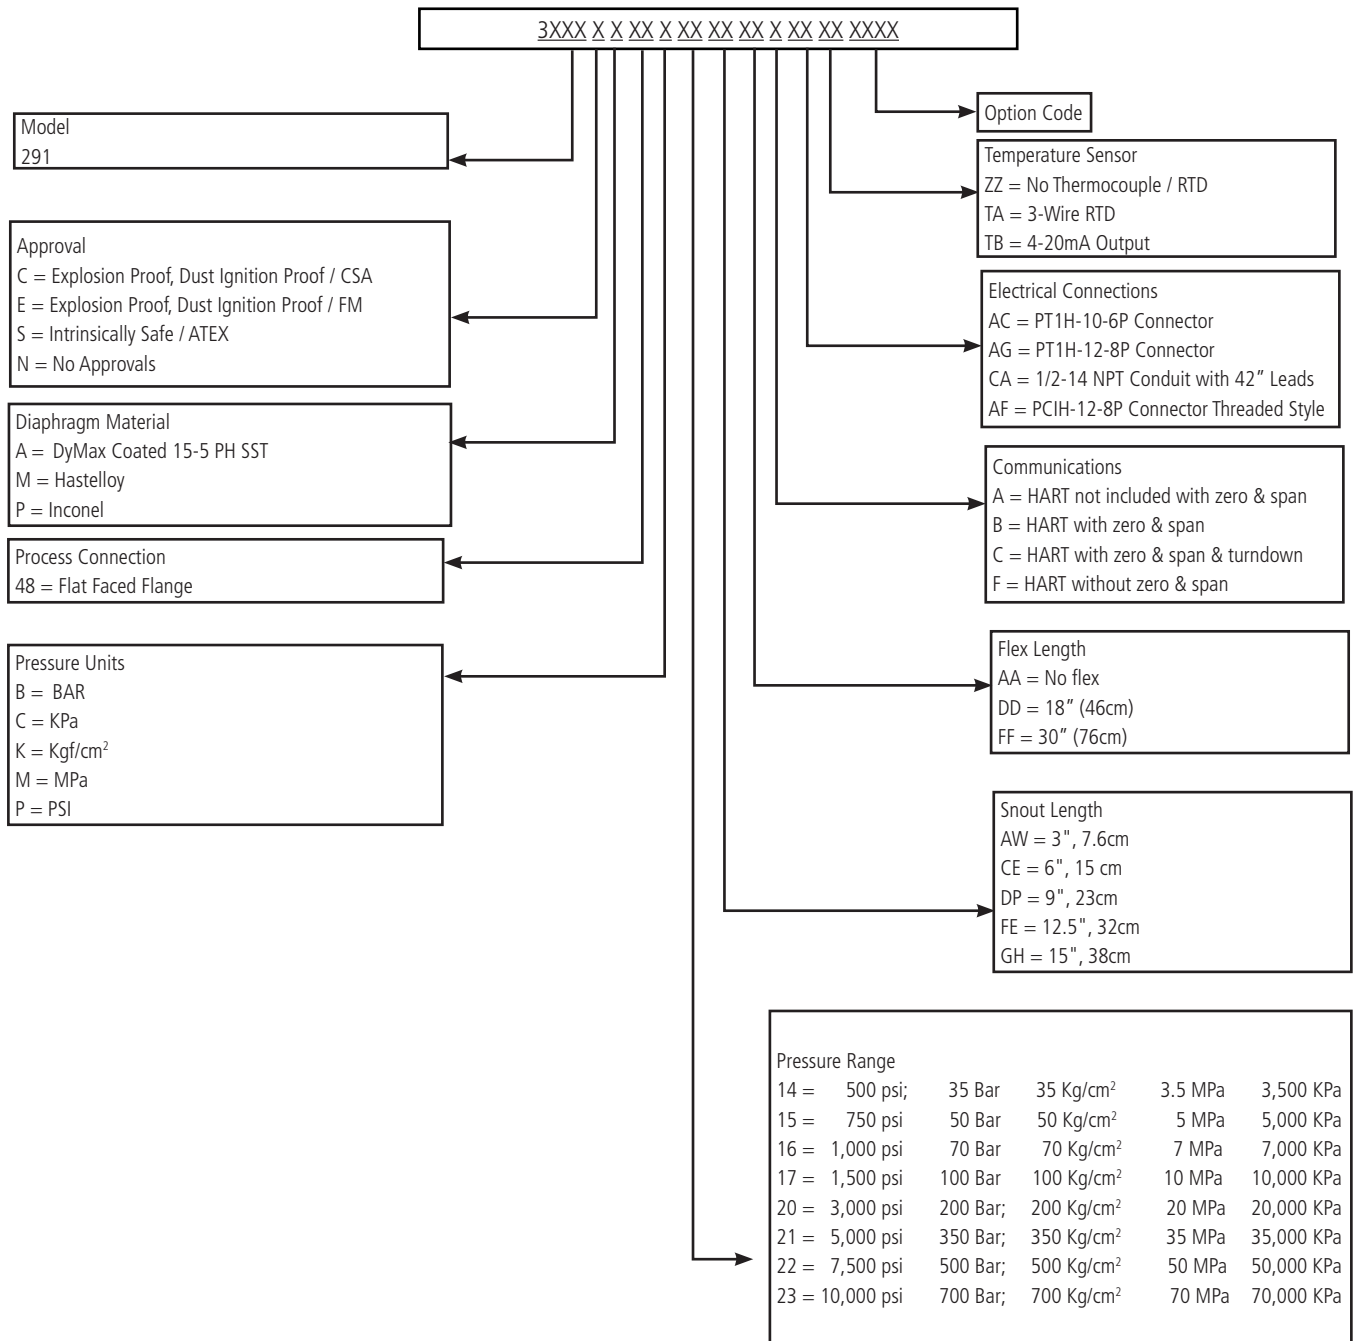


¹ Other configurations are available. Please consult factory.

Ordering Guide for Models SPX3390¹

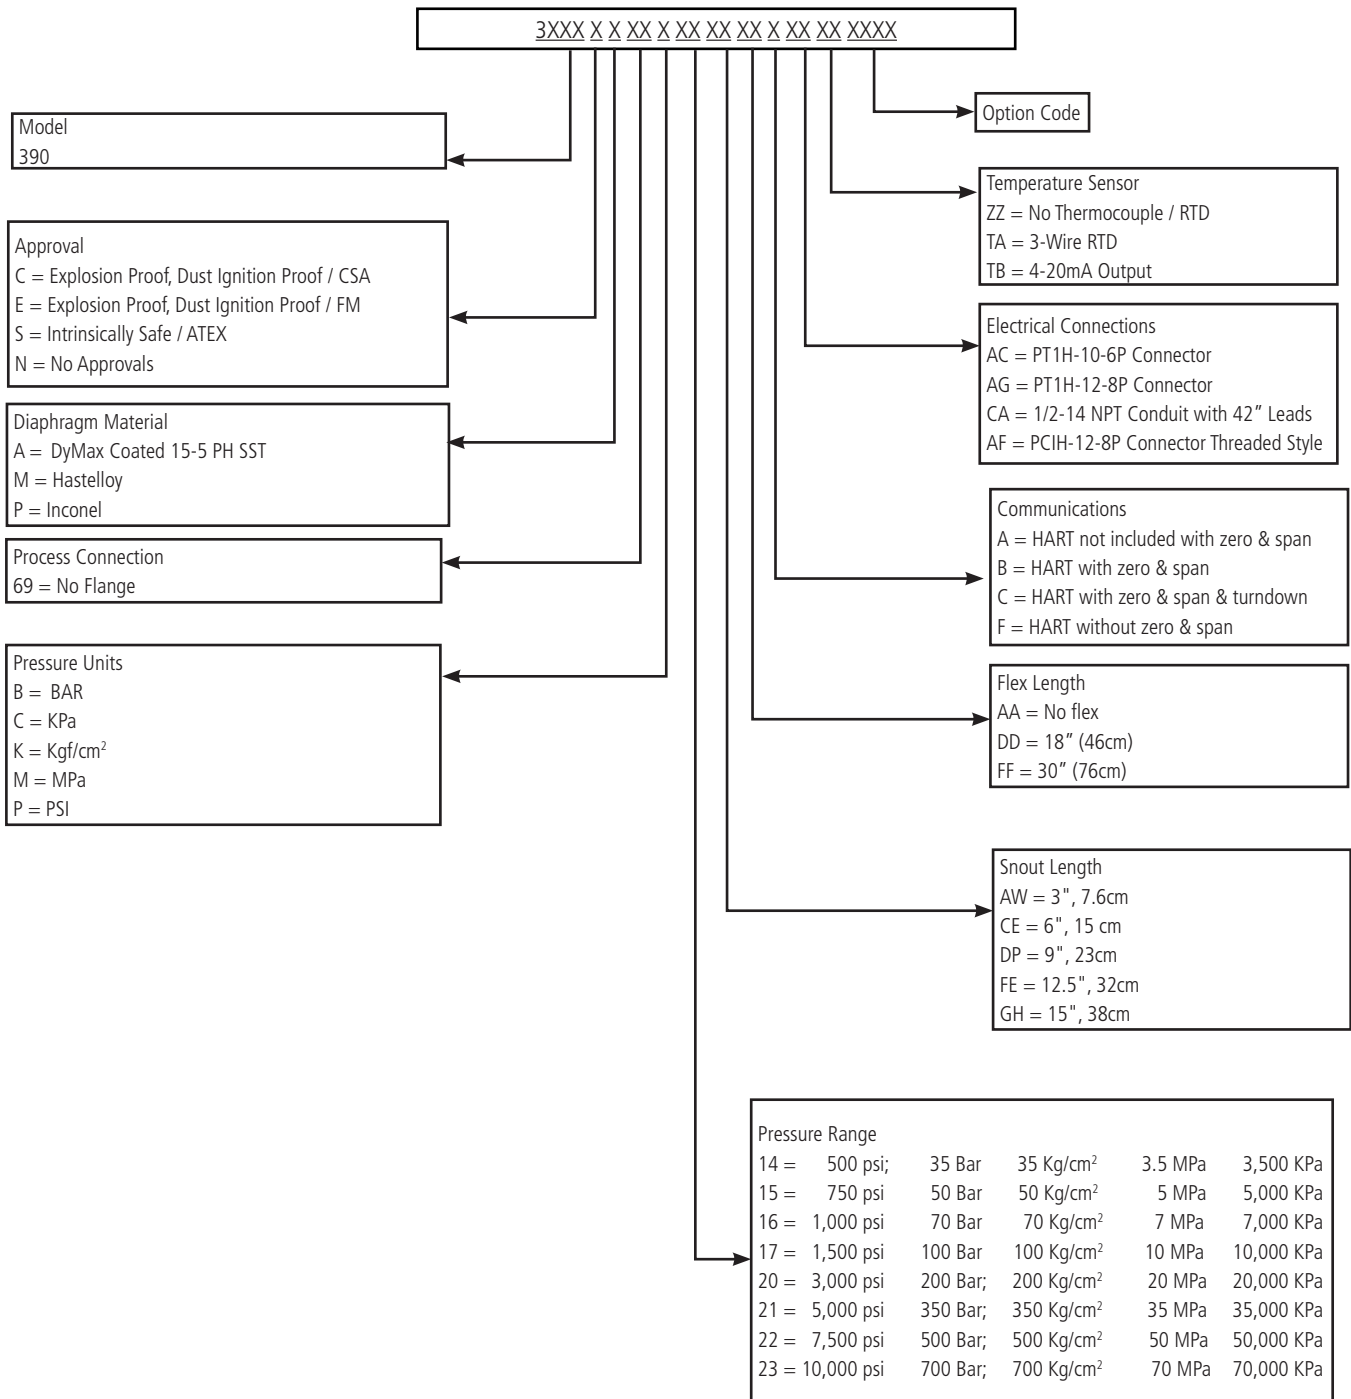

¹ Other configurations are available. Please consult factory.

Ordering Guide for Models SPX3391¹

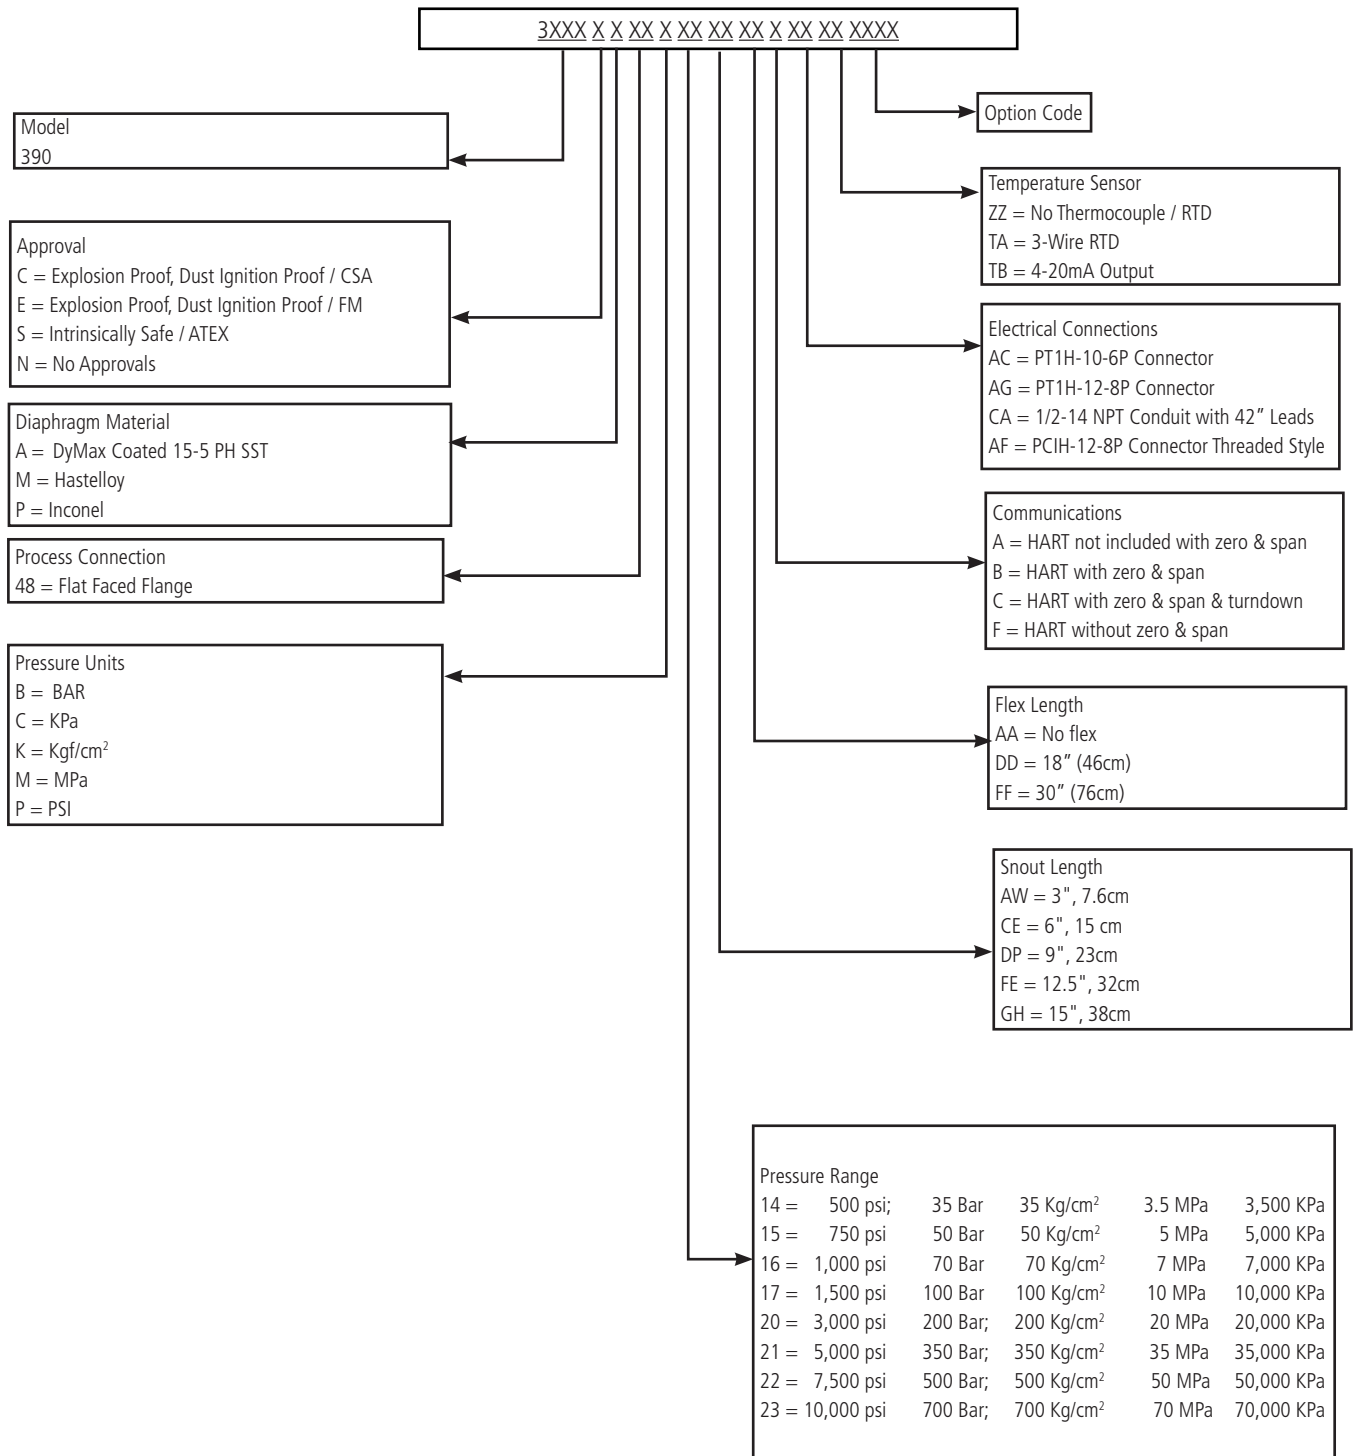


¹ Other configurations are available. Please consult factory.

REV	ECO	BY	APP	DATE
C	46553	TP	LEB	07/29/16



642001

DETAIL 'A'




ELECTRICAL HOUSING, CONNECTOR

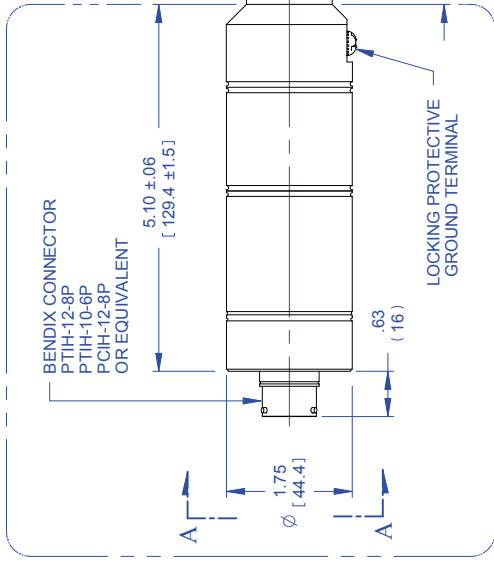

ELECTRICAL HOUSING, CONDUIT
PER DETAIL 'A'

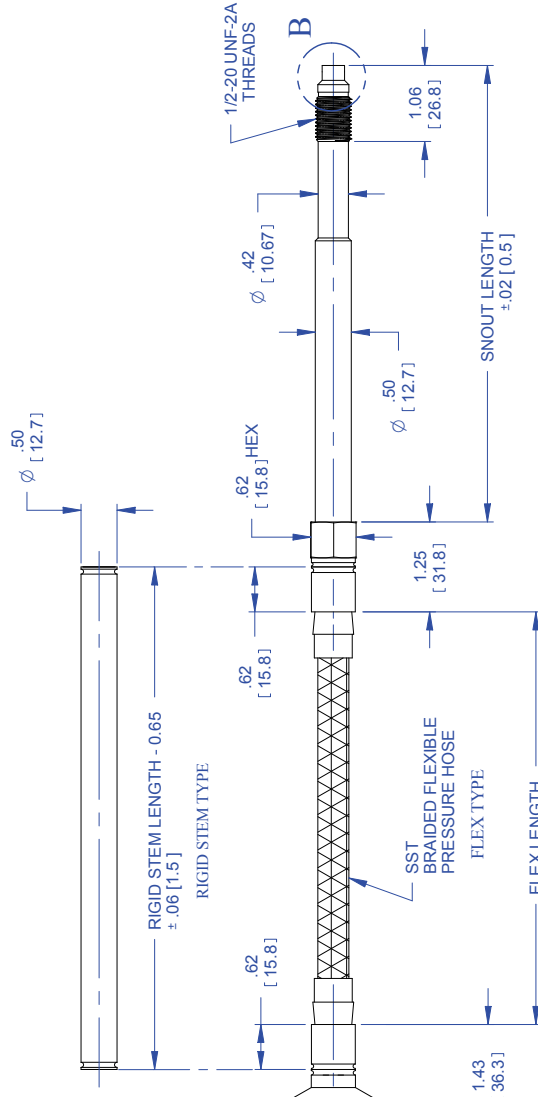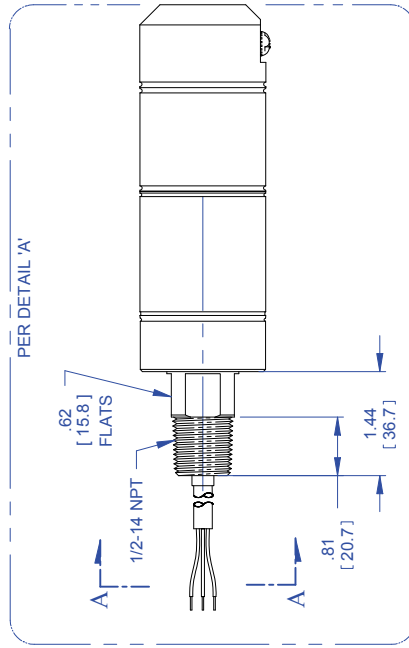

ZERO AND SPAN ADJUSTERS ARE PROTECTED BY SEAL SCREWS

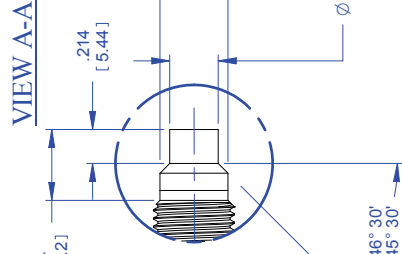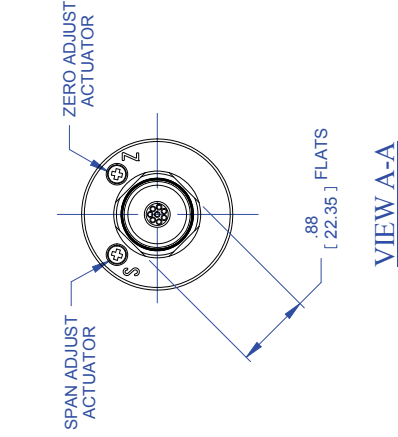

DETAIL 'B'

TITLE	SPX-T 3342 OUTLINE DWG
MODEL NO.	SPX-T
DRAWN	DRC
CHECKED	DATE
APPROVED	MIL
FINISH	63

DATE	01/30/07
DATE	05/27/08
DATE	05/27/08
DATE	05/27/08
DATE	05/27/08
DATE	05/27/08

DO NOT SCALE DRAWING

MATERIAL

SCALE NONE SHEET 1 OF 1

REV C

DWG. NO. 642001

FORGE PARTWAY TRANSLINK, VA

Dynisco

EXCEPT AS MAY BE OTHERWISE PROVIDED BY CONTRACT, THESE DRAWINGS AND SPECIFICATIONS SHALL BE VOID IN THE EVENT OF A DISCREPANCY BETWEEN THE DRAWINGS AND THE PARTS LISTED HEREIN. THE PARTS LISTED HEREIN IS FOR THE MANUFACTURE OR SALE OF APPARATUS WITHOUT PERMISSION.

SIGNAL	TERMINAL DESCRIPTION	CONDUIT-LEAD WIRE COLOR	6-PIN	8-PIN
PRIMARY 4-20mA	PWR+/SIG+	RED	A	A
	PWR-/SIG-	BLACK	B	B
	CASE	GREEN	-	-
	OPTIONS			
RCAL ONLY	RCAL+	ORANGE	F	E
	RCAL-	BLUE	E	D
RCAL WITH SECONDARY 4-20mA ONLY	RCAL+	ORANGE	-	D
	RCAL-	BLUE	-	D
	2ND PWR+/SIG+	VIOLET	-	G
	2ND PWR-/SIG-	YELLOW	-	H
SECONDARY 4-20mA ONLY	2ND PWR+/SIG+	VIOLET	-	H
	2ND PWR-/SIG-	YELLOW	-	H
DUAL RTD ONLY	RTD (-)	WHITE	-	D
	RTD (+)	GREY	-	E
	RTD (+)	BROWN	-	F


NOTES:

- ALL DIMENSIONS ARE INCHES [MILLIMETERS]
- EXPOSED SURFACES ARE STAINLESS STEEL.


REV	ECO	BY	APP	DATE
C	46553	TP	LEB	07/29/16 R

643001


DETAIL 'A'

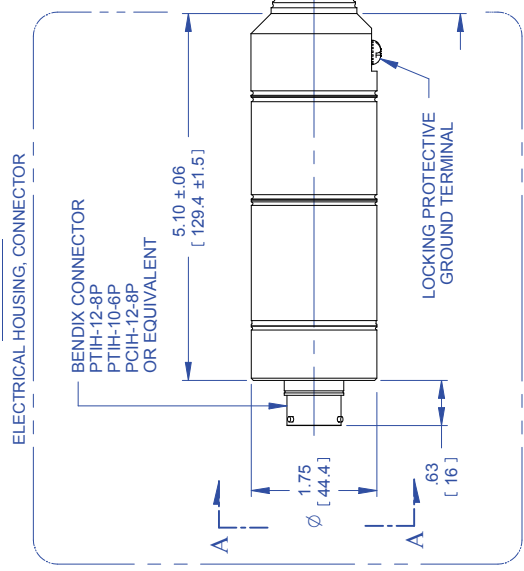

PER DETAIL 'A'

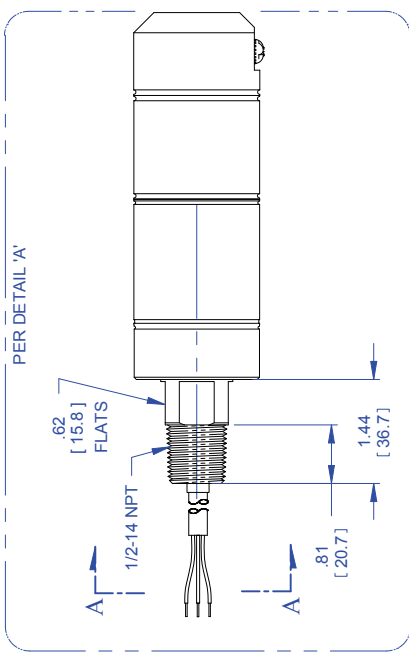


ZERO AND SPAN ADJUSTS ARE PROTECTED BY SEAL SCREWS

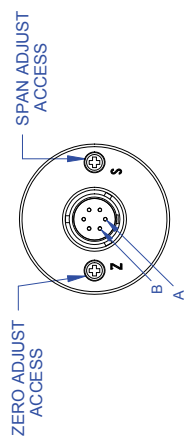


VIEW A-A

NOTES:
 1. ALL DIMENSIONS ARE INCHES [MILLIMETERS]
 2. EXPOSED SURFACES ARE STAINLESS STEEL.

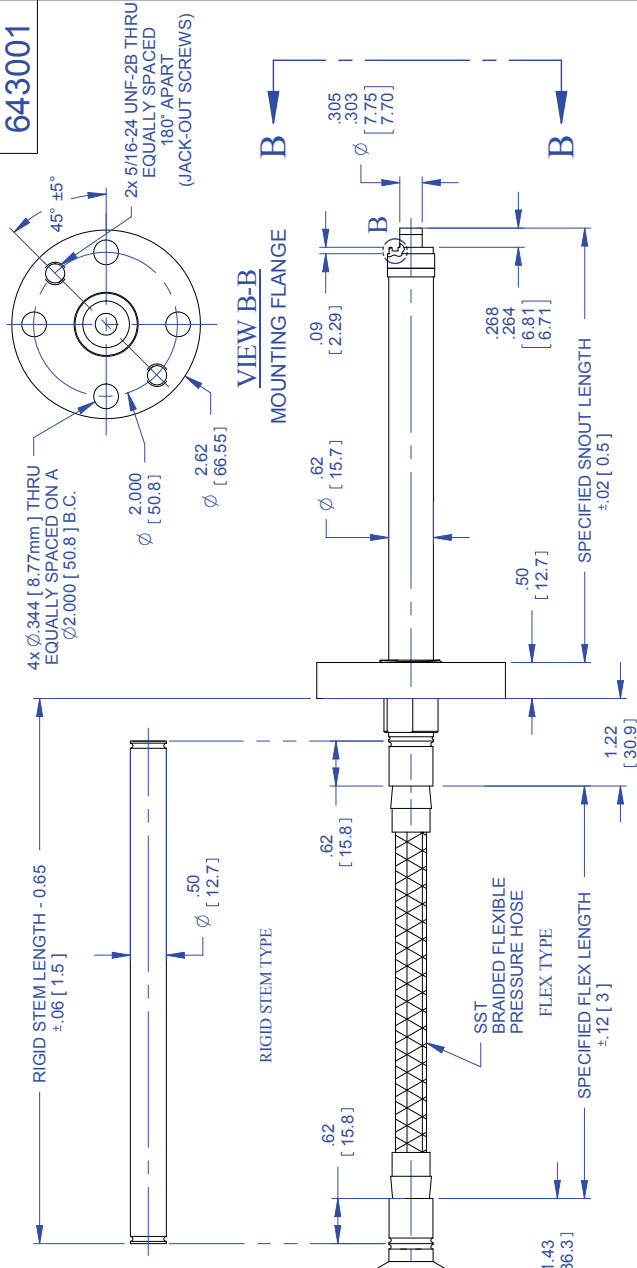


VIEW A-A

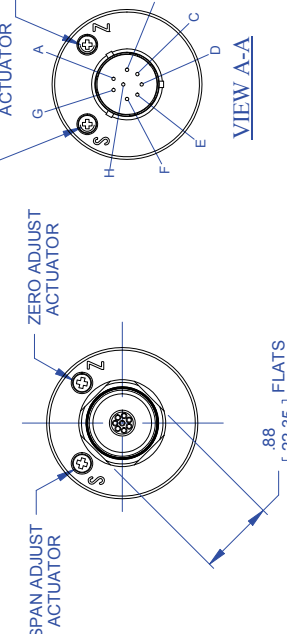

VIEW A-A



DETAIL 'B'
 O-RING GROOVE
 GROOVE FOR 1/2 NOM O.D. VENTED METAL O-RING, (SILVER PLATED)
 DYNISCO PIN 652116



SIGNAL	TERMINAL DESCRIPTION	CASE	OPTIONS	CONDUIT-LEAD WIRE COLOR	6-PIN		8-PIN	
					A	B	A	B
PRIMARY 4-20mA	PWR+/SIG+	RCAL+	RCAL+	RED	A	A	A	A
	PWR-/SIG-	RCAL-	RCAL-	BLACK	B	B	B	B
				GREEN	-	-	-	-
SECONDARY 4-20mA ONLY	2ND PWR+/SIG+	RCAL+	RCAL+	ORANGE	F	F	F	F
	2ND PWR-/SIG-	RCAL-	RCAL-	BLUE	E	E	E	E
				ORANGE	-	-	-	-
SECONDARY 4-20mA ONLY	2ND PWR+/SIG+	RCAL+	RCAL+	BLUE	D	D	D	D
	2ND PWR-/SIG-	RCAL-	RCAL-	VIOLET	G	G	G	G
				YELLOW	-	-	-	-
DUAL RTD ONLY	2ND PWR+/SIG+	RTD (+)	RTD (+)	YELLOW	H	H	H	H
	2ND PWR-/SIG-	RTD (-)	RTD (-)	WHITE	D	D	D	D
				GREY	E	E	E	E
				BROWN	F	F	F	F


DO NOT SCALE DRAWING	
CHECKED	DATE
APPROVED	DATE
FINISH	DATE

TITLE	
SPX-T 3343	
OUTLINE DWG	
DATE	DATE
DATE	DATE






DYNISCO	
FORCE MAJOR	TRAVEL
SIZE	REV
C	C
643001	1
NONE	OF 1

DETAIL 'A'

ELECTRICAL HOUSING, CONNECTOR

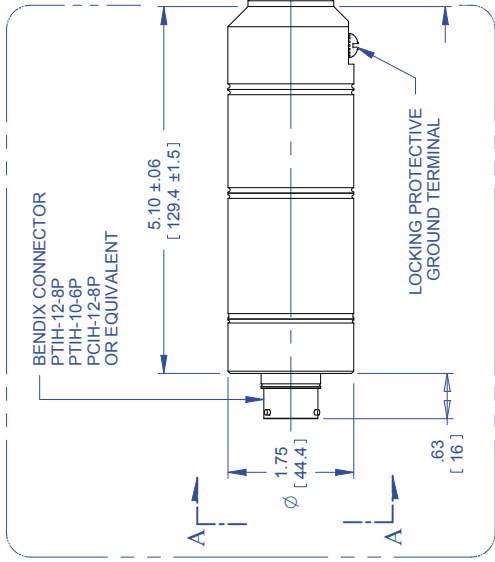

ELECTRICAL HOUSING, CONDUIT

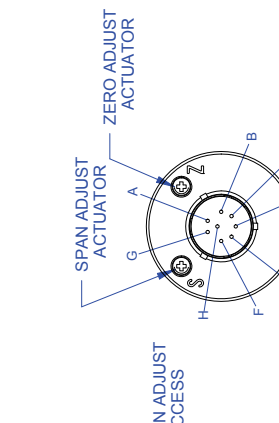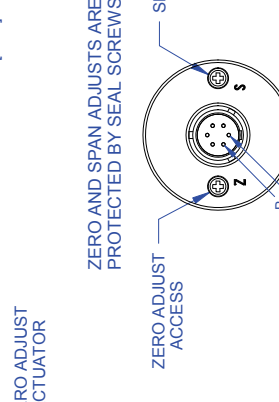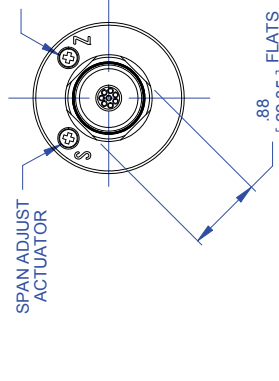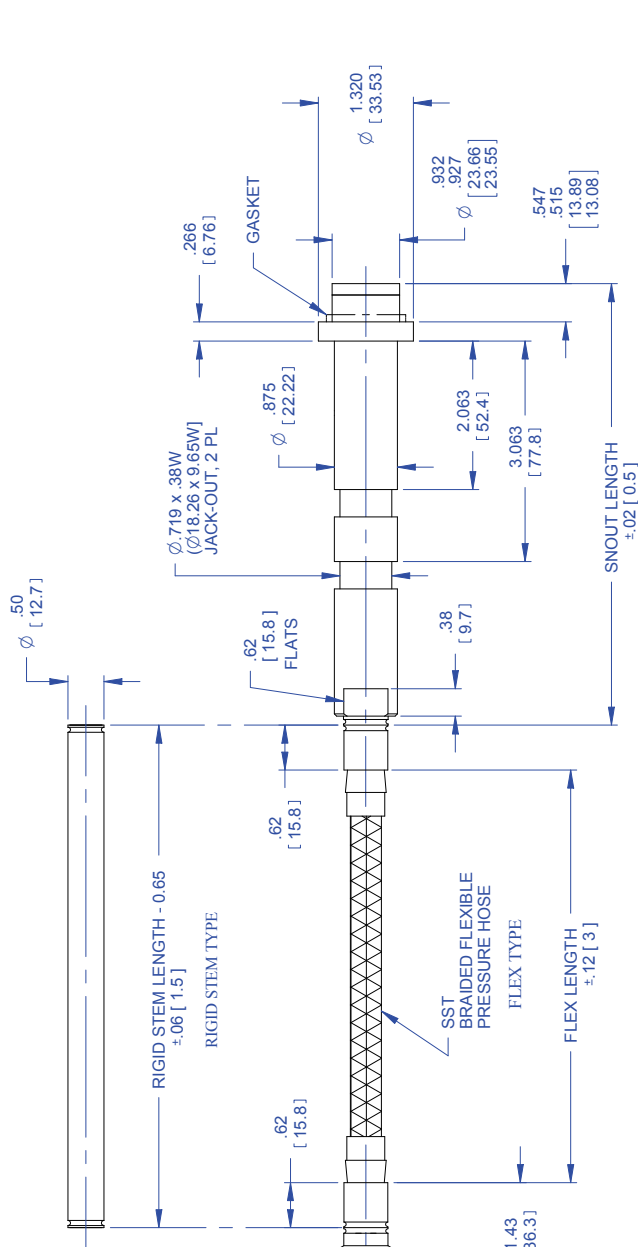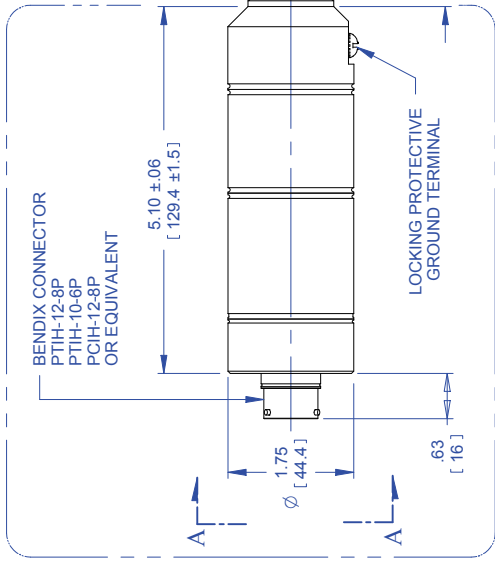

SIGNAL	TERMINAL DESCRIPTION	CONDUIT-LEAD WIRE COLOR	6-PIN 8-PIN
PRIMARY 4-20mA	PWR+/SIG+	RED	A A
	PWR-/SIG-	BLACK	B B
	CASE	GREEN	- -
OPTIONS			
RCAL ONLY	RCAL+	ORANGE	F E
	RCAL-	BLUE	E D
RCAL WITH SECONDARY 4-20mA ONLY	RCAL+	ORANGE	- E
	RCAL-	BLUE	- D
	2ND PWR+/SIG+	VIOLET	- G
SECONDARY 4-20mA ONLY	2ND PWR-/SIG-	YELLOW	- H
	2ND PWR+/SIG+	VIOLET	- G
	2ND PWR-/SIG-	YELLOW	- H
DUAL RTD ONLY	RTD (-)	WHITE	- D
	RTD (+)	GREY	- E
	RTD (+)	BROWN	- F

NOTES:
1. ALL DIMENSIONS ARE INCHES [MILLIMETERS]
2. EXPOSED SURFACES ARE STAINLESS STEEL.

1. UNLESS OTHERWISE SPECIFIED:
2. UNLESS OTHERWISE SPECIFIED:
3. UNLESS OTHERWISE SPECIFIED:
4. UNLESS OTHERWISE SPECIFIED:
5. UNLESS OTHERWISE SPECIFIED:
6. UNLESS OTHERWISE SPECIFIED:
7. UNLESS OTHERWISE SPECIFIED:
8. UNLESS OTHERWISE SPECIFIED:
9. UNLESS OTHERWISE SPECIFIED:
10. UNLESS OTHERWISE SPECIFIED:
11. UNLESS OTHERWISE SPECIFIED:
12. UNLESS OTHERWISE SPECIFIED:
13. UNLESS OTHERWISE SPECIFIED:
14. UNLESS OTHERWISE SPECIFIED:
15. UNLESS OTHERWISE SPECIFIED:
16. UNLESS OTHERWISE SPECIFIED:
17. UNLESS OTHERWISE SPECIFIED:
18. UNLESS OTHERWISE SPECIFIED:
19. UNLESS OTHERWISE SPECIFIED:
20. UNLESS OTHERWISE SPECIFIED:
21. UNLESS OTHERWISE SPECIFIED:
22. UNLESS OTHERWISE SPECIFIED:
23. UNLESS OTHERWISE SPECIFIED:
24. UNLESS OTHERWISE SPECIFIED:
25. UNLESS OTHERWISE SPECIFIED:
26. UNLESS OTHERWISE SPECIFIED:
27. UNLESS OTHERWISE SPECIFIED:
28. UNLESS OTHERWISE SPECIFIED:
29. UNLESS OTHERWISE SPECIFIED:
30. UNLESS OTHERWISE SPECIFIED:
31. UNLESS OTHERWISE SPECIFIED:
32. UNLESS OTHERWISE SPECIFIED:
33. UNLESS OTHERWISE SPECIFIED:
34. UNLESS OTHERWISE SPECIFIED:
35. UNLESS OTHERWISE SPECIFIED:
36. UNLESS OTHERWISE SPECIFIED:
37. UNLESS OTHERWISE SPECIFIED:
38. UNLESS OTHERWISE SPECIFIED:
39. UNLESS OTHERWISE SPECIFIED:
40. UNLESS OTHERWISE SPECIFIED:
41. UNLESS OTHERWISE SPECIFIED:
42. UNLESS OTHERWISE SPECIFIED:
43. UNLESS OTHERWISE SPECIFIED:
44. UNLESS OTHERWISE SPECIFIED:
45. UNLESS OTHERWISE SPECIFIED:
46. UNLESS OTHERWISE SPECIFIED:
47. UNLESS OTHERWISE SPECIFIED:
48. UNLESS OTHERWISE SPECIFIED:
49. UNLESS OTHERWISE SPECIFIED:
50. UNLESS OTHERWISE SPECIFIED:
51. UNLESS OTHERWISE SPECIFIED:
52. UNLESS OTHERWISE SPECIFIED:
53. UNLESS OTHERWISE SPECIFIED:
54. UNLESS OTHERWISE SPECIFIED:
55. UNLESS OTHERWISE SPECIFIED:
56. UNLESS OTHERWISE SPECIFIED:
57. UNLESS OTHERWISE SPECIFIED:
58. UNLESS OTHERWISE SPECIFIED:
59. UNLESS OTHERWISE SPECIFIED:
60. UNLESS OTHERWISE SPECIFIED:
61. UNLESS OTHERWISE SPECIFIED:
62. UNLESS OTHERWISE SPECIFIED:
63. UNLESS OTHERWISE SPECIFIED:
64. UNLESS OTHERWISE SPECIFIED:
65. UNLESS OTHERWISE SPECIFIED:
66. UNLESS OTHERWISE SPECIFIED:
67. UNLESS OTHERWISE SPECIFIED:
68. UNLESS OTHERWISE SPECIFIED:
69. UNLESS OTHERWISE SPECIFIED:
70. UNLESS OTHERWISE SPECIFIED:
71. UNLESS OTHERWISE SPECIFIED:
72. UNLESS OTHERWISE SPECIFIED:
73. UNLESS OTHERWISE SPECIFIED:
74. UNLESS OTHERWISE SPECIFIED:
75. UNLESS OTHERWISE SPECIFIED:
76. UNLESS OTHERWISE SPECIFIED:
77. UNLESS OTHERWISE SPECIFIED:
78. UNLESS OTHERWISE SPECIFIED:
79. UNLESS OTHERWISE SPECIFIED:
80. UNLESS OTHERWISE SPECIFIED:
81. UNLESS OTHERWISE SPECIFIED:
82. UNLESS OTHERWISE SPECIFIED:
83. UNLESS OTHERWISE SPECIFIED:
84. UNLESS OTHERWISE SPECIFIED:
85. UNLESS OTHERWISE SPECIFIED:
86. UNLESS OTHERWISE SPECIFIED:
87. UNLESS OTHERWISE SPECIFIED:
88. UNLESS OTHERWISE SPECIFIED:
89. UNLESS OTHERWISE SPECIFIED:
90. UNLESS OTHERWISE SPECIFIED:
91. UNLESS OTHERWISE SPECIFIED:
92. UNLESS OTHERWISE SPECIFIED:
93. UNLESS OTHERWISE SPECIFIED:
94. UNLESS OTHERWISE SPECIFIED:
95. UNLESS OTHERWISE SPECIFIED:
96. UNLESS OTHERWISE SPECIFIED:
97. UNLESS OTHERWISE SPECIFIED:
98. UNLESS OTHERWISE SPECIFIED:
99. UNLESS OTHERWISE SPECIFIED:
100. UNLESS OTHERWISE SPECIFIED:

TITLE
SPX-T 3390
OUTLINE DWG

DATE 05/01/08
DATE 05/20/08
DATE 05/20/08
DATE 05/20/08

MODEL NO. SPX-T
DRAWN MUL
CHECKED MUL
APPROVED MUL
FINISH 63

DO NOT SCALE DRAWING
MATERIAL

SCALE NONE SHEET 1 OF 1

Dynisco
FORCE MAJORWAY TRAVELING SALES
DIV. NO.
C 690001 C

EXCEPT AS MAY BE OTHERWISE PROVIDED BY CONTRACT, THESE DRAWINGS AND SPECIFICATIONS SHALL BE THE PROPERTY OF DYNISCO AND SHALL NOT BE REPRODUCED OR TRANSMITTED IN ANY FORM OR BY ANY MEANS, ELECTRONIC OR MECHANICAL, INCLUDING PHOTOCOPYING, RECORDING, OR BY ANY INFORMATION STORAGE AND RETRIEVAL SYSTEM, WITHOUT PERMISSION.


REV	ECO	BY	APP	DATE
C	46553	TP	LEB	07/29/16 R

691001

DETAIL 'A'


ELECTRICAL HOUSING, CONNECTOR

BENDIX CONNECTOR
PTIH-12-8P
PTIH-10-6P
POIH-12-8P
OR EQUIVALENT

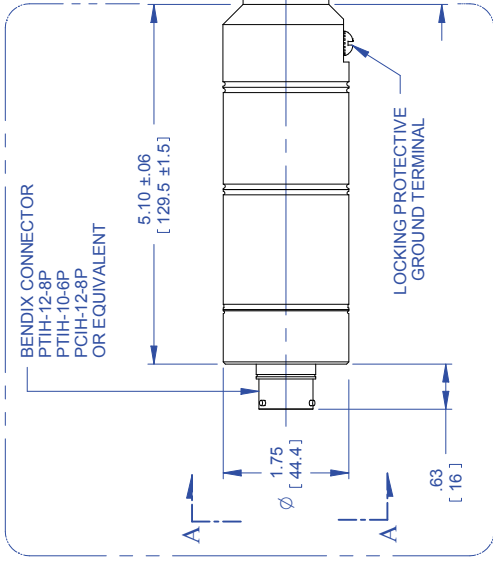


ELECTRICAL HOUSING, CONDUIT

PER DETAIL 'A'

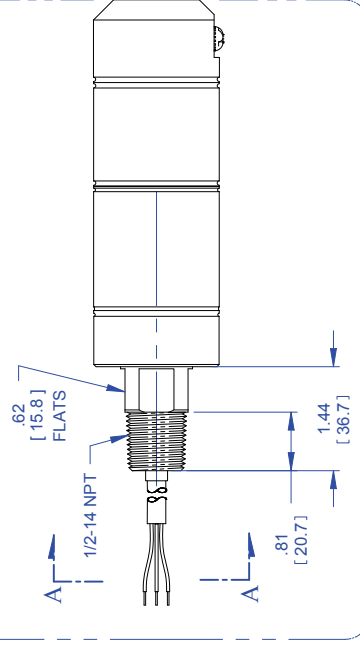


ZERO AND SPAN ADJUSTS ARE PROTECTED BY SEAL SCREWS

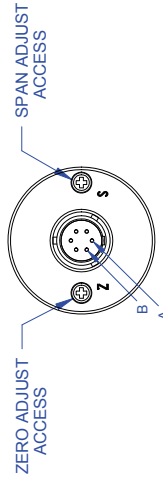


NOTES:

1. ALL DIMENSIONS ARE INCHES [MILLIMETERS]
2. EXPOSED SURFACES ARE STAINLESS STEEL.

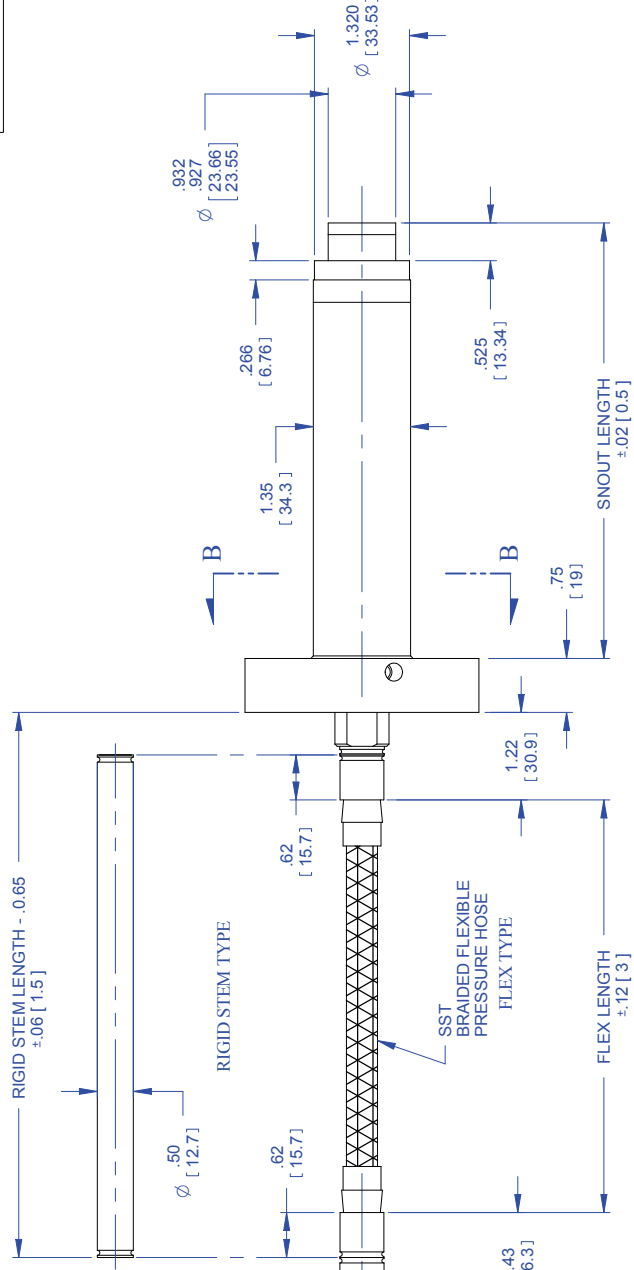


SPAN ADJUST ACTUATOR




VIEW A-A

SPAN ADJUST ACTUATOR

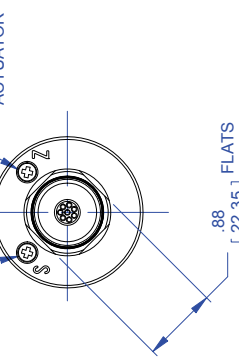


VIEW A-A

ZERO ADJUST ACTUATOR



VIEW A-A

ZERO ADJUST ACTUATOR




VIEW A-A

SIGNAL	TERMINAL DESCRIPTION	CONDUIT-LEAD WIRE COLOR	6-PIN 8-PIN
PRIMARY 4-20mA	PWR+/SIG+	RED	A
	PWR-/SIG-	BLACK	B
	CASE	GREEN	-
OPTIONS			
RCAL ONLY	RCAL+	ORANGE	F
	RCAL-	BLUE	E
RCAL WITH SECONDARY 4-20mA ONLY	RCAL+	ORANGE	-
	RCAL-	BLUE	-
	2ND PWR+/SIG+	VIOLET	G
	2ND PWR-/SIG-	YELLOW	H
SECONDARY 4-20mA ONLY	2ND PWR+/SIG+	VIOLET	-
	2ND PWR-/SIG-	YELLOW	-
DUAL RTD ONLY	RTD (-)	WHITE	-
	RTD (+)	GREY	-
	RTD (+)	BROWN	-

VIEW B-B

MOUNTING FLANGE "S1"

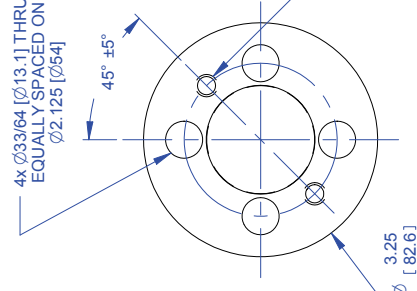

TOLERANCES UNLESS OTHERWISE SPECIFIED:

1. FRACTIONS DECIMAL 0.05
2. FRACTIONS DECIMAL 0.005
3. DECIMALS -0.0025, 0.005, 0.010, 0.020, 0.050
4. ANGLES ±10° MAX
5. EDGES R .005 OR CHAMFER MAX
6. ALL DIMENSIONS ARE IN INCHES
7. ALL DIMENSIONS ARE TO UNLESS OTHERWISE SPECIFIED

TITLE
SPX-T 3391
OUTLINE DWG

MODEL NO.	SPX-T
DRAWN	DRC
CHECKED	DATE
APPROVED	MIL
FINISH	63

DATE	01/30/07
DATE	5/27/08
DATE	5/27/08
SCALE	NONE
SHEET	1 OF 1



FORCE MAJORITAT TRANSKORVA


DWG. NO.

SIZE


REV

REV	ECO	BY	APP	DATE
A	46553	TP	LEB	07/29/16 R


000652

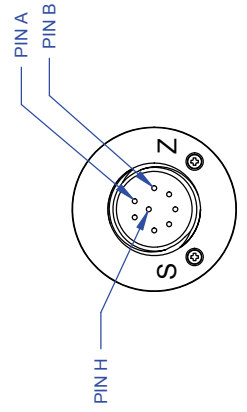

8 - PIN PC
O-RING WITH PUSH BUTTONS
PCIH-12-8P

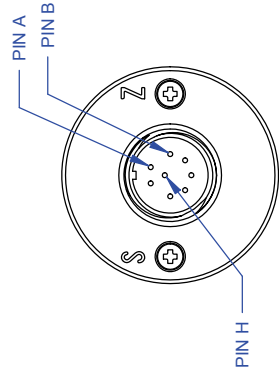

8 - PIN PC
WELDED WITH PUSH BUTTONS
PCIH-12-8P

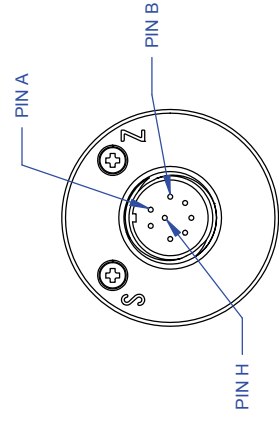

8 - PIN PC
WELDED WITH HALLS
PCIH-12-8P

GUARDIAN CONNECTOR WIRING	
PIN	FUNCTION
A	POWER +
B	SIGNAL -
C	POWER -
D	NO CONNECTION
E	Rcal -
F	Rcal +
G	RELAY CONTACT
H	RELAY CONTACT

NOTE:
1. THESE CONNECTOR OPTIONS ARE AVAILABLE ON MOST OF THE CONFIGURATIONS SHOWN ON THE PREVIOUS SHEETS.

TOLERANCES UNLESS OTHERWISE SPECIFIED:
 1. PLACE DECIMAL ± .005
 2. FRACTIONS ± 1/32
 3. DRILLS < 0.5 DIA. ± .002 > 0.5 DIA. ± .003
 4. ANGLES ± 0.5° MAX.
 5. EDGES R .006 OR CHAMFER MAX.
 6. PART TO BE FREE OF BURRS
 7. PART TO BE FREE OF BURRS
 8. ALL DIMENSIONS ARE IN INCHES.

TITLE		DATE	
GUARDIAN SERIES CONNECTORS		TP	7/27/16
DRAWN	CHECKED	DATE	DATE
LEB	LEB	7/27/16	7/27/16
APPROVED	APPROVED		
FINISH	FINISH	63 ✓	

SIZE		REV	
B		A	
DWG. NO.		REV	
000652			
SCALE NONE SHEET 1 OF 1			

EXCEPT AS MAY BE OTHERWISE PROVIDED BY CONTRACT, THESE DRAWINGS AND SPECIFICATIONS ARE THE PROPERTY OF DYNISCO. ARE ISSUED IN REPRODUCTION OF THE ORIGINAL DRAWING. ANY REPRODUCTION OR COPIED, OR USED AS THE BASIS FOR THE MANUFACTURE OR SALE OF APPARATUS WITHOUT PERMISSION.



